

ACTA CARSOLOGICA	34/1	1	9-23	LJUBLJANA 2005
------------------	------	---	------	----------------

COBISS: 1.01

**THEORETICAL INVESTIGATION OF THE DURATION OF
KARSTIC DENUDATION ON BARE, SLOPING LIMESTONE
SURFACE**

HITROST KRAŠKE DENUDACIJE NA GOLEM APNENČASTEM
POVRŠJU - TEORETIČNI PRISTOP

GÁBOR SZUNYOGH¹

¹ Dr. Szunyogh Gábor, Berzsényi Dániel Főiskola, Fizika Tanszék, Szombathely, Károlyi Gáspár tér 4, H 9700,
Email: szgabor@nadir.hmst.hu, Tel.: 00 36 94 504 352

Abstract

UDC: 551.311:551.44

Gábor Szunyogh: A Theoretical Approach to Establish the Duration of Denudation on Limestone Surface without Soil Cover

This paper deals with the question of how the duration of karstic denudation depends on the dip angle, the annual amount of precipitation, the rain intensity, and the prevailing wind direction and speed in case of an initially plane, sloping limestone surface without soil cover. The answer is given by the solution of a differential equation system describing the lowering speed of the rock surface. It turns out that the rate of the denudation does not increase in proportion to the intensity of precipitation and that it can never exceed a maximal value. Furthermore, long, soft rains result in higher annual denudation than short, abundant downpours. With increasing wind-speed the corrosion rate also increases, but above a certain wind speed the dissolution does not become faster. This paper presents numerical examples with diagrams about how these factors affect the expected duration of denudation.

Key words: karstic denudation, lowering speed, rain intensity, slope angle, theoretical model, wind.

Izvleček

UDK: 551.311:551.44

Gábor Szunyogh: Hitrost kraške denudacije na golem apnenčastem površju - teoretični pristop

V članku obravnavam hitrost kraške denudacije na primeru nagnjene apnenčaste plošče, neposredno izpostavljene dežju. Zanima me, kako je hitrost denudacije odvisna od parametrov kot so naklon površine, količina in intenziteta padavin ter smer in hitrost vetra. Odgovor poiščem v rešitvi diferencialne enačbe, ki opisuje hitrost zniževanja površine. Izkáže se, da se hitrost denudacije ne veča sorazmerno z intenziteto padavin in da nikoli ne preseže določene mejne vrednosti. Dolgotrajno deževje majhne intenzitete povzroča višjo denudacijsko stopnjo, kot niz kratkotrajnih padavin. Hitrost denudacije narašča s hitrostjo vetra, vendar le do določene hitrosti.

Ključne besede: kraška denudacija, hitrost zniževanja površja, intenziteta padavin, naklonski kot površja, teoretični modeli, veter.

INTRODUCTION

In case of field experiments a frequently asked question is how much time is necessary for the karstic denudation of a sloping limestone surface to reach the actual shape. The answer is usually uncertain since many factors (e.g. the aspect and the dip angle of the slope, the amount and the intensity of rainfall, the direction and the force of the wind, etc.) influence the denudation time and large differences are possible. It is well-known that several research teams perform regular „in situ” measurements in order to get the rate of denudation (High and Hanna 1970; White 2000). The different ways how the bare limestone surface is corroded and its morphology are the subjects of long and widespread research (Ford and Williams 1989; Veress 2000, 2004; Veress & Zentai et al. 2003; Telbisz 1999a, 1999b; Klimchouk & al. 2000, etc). Although most of the ideas take qualitatively into account that there is a strong correlation between the karst corrosion rate and the flow properties of the water resulting from the slope conditions of the area, quantitative equations have as yet not been formulated. Based on the limestone solution kinetics equations of Dreybrodt (1989), a mathematical model of this type of denudation has been developed by the author (Szunyogh 2000).

THE EQUATIONS OF LANDFORM EVOLUTION WITH CONSIDERATION TO WIND SPEED AND DAILY HOURS OF RAINFALL

The model is based upon the general equation system describing the denudation of bare (without soil cover) limestone surfaces. The aim of this system is to determine the function

$$z = f(x, y, t) \tag{1}$$

that gives the rock surface at time t , where z is the height above sea level, x and y are horizontal coordinates of the surface points (Fig. 1). The limestone is dissolved by carbonic acid in the rain water, consequently the shape of its surface keeps changing. The lowering speed of the rock surface can be interpreted by the following derivative:

$$w = \frac{dz}{dt} \tag{2}$$

(The minus sign is given to express the fact that the surface is lowered due to karstic denudation, i.e. $z(x,y,t)$ decreases as time passes.)

In order to determine the sinking speed or the shape of the surface, the following laws are built in the model:

1. *The law of mass conservation is applied for the water.* Let us consider theoretically a small volume of water that is in connection with the limestone surface (Fig. 2). The sides are vertical and parallel with the x and y axes, and the side lengths are dx and dy , respectively. The height is equal to the depth of water moving on the rock surface, and the top coincides with the water surface. According to the law of mass conservation the amount of water flowing into this small volume through the sides and the top during a time unit should be equal with the amount of water flowing out of it. It is mathematically expressed by the following formula:

$$\frac{\partial(mv_x)}{\partial x} + \frac{\partial(mv_y)}{\partial y} = -\frac{1}{\rho_{\text{water}}} \frac{\mathbf{q}_{\text{rain}} \cdot \mathbf{n}}{\cos \alpha} \tag{3}$$

In order to determine ρ_{rain} we can use the definition of the annual precipitation, Q_a , that is the volume of rain water in a horizontal unit area over a year. Moreover, this water amount is directly proportional to the vertical component of the rain mass-flow density, so

$$\rho_{water} Q_a = \rho_{rain} v_{dr} t_d N_a, \quad (7)$$

where t_d marks the daily sum of rainfall hours and N_a is the number of days during a year. Expressing ρ_{rain} from Eq. (7) we get the following formula:

$$\rho_{rain} = \frac{\rho_{water} Q_a}{v_{dr} t_d N_a}. \quad (8)$$

The values of \mathbf{n} and $\cos \alpha$ on the right of Eq. (3) can be obtained by partial differentiation of the function describing the shape of the rock surface:

$$\mathbf{n} = \left(-\frac{\partial z}{\partial x} \mathbf{i} - \frac{\partial z}{\partial y} \mathbf{j} + \mathbf{k} \right) \left[\left(\frac{\partial z}{\partial x} \right)^2 + \left(\frac{\partial z}{\partial y} \right)^2 + 1 \right]^{-\frac{1}{2}}, \quad (9)$$

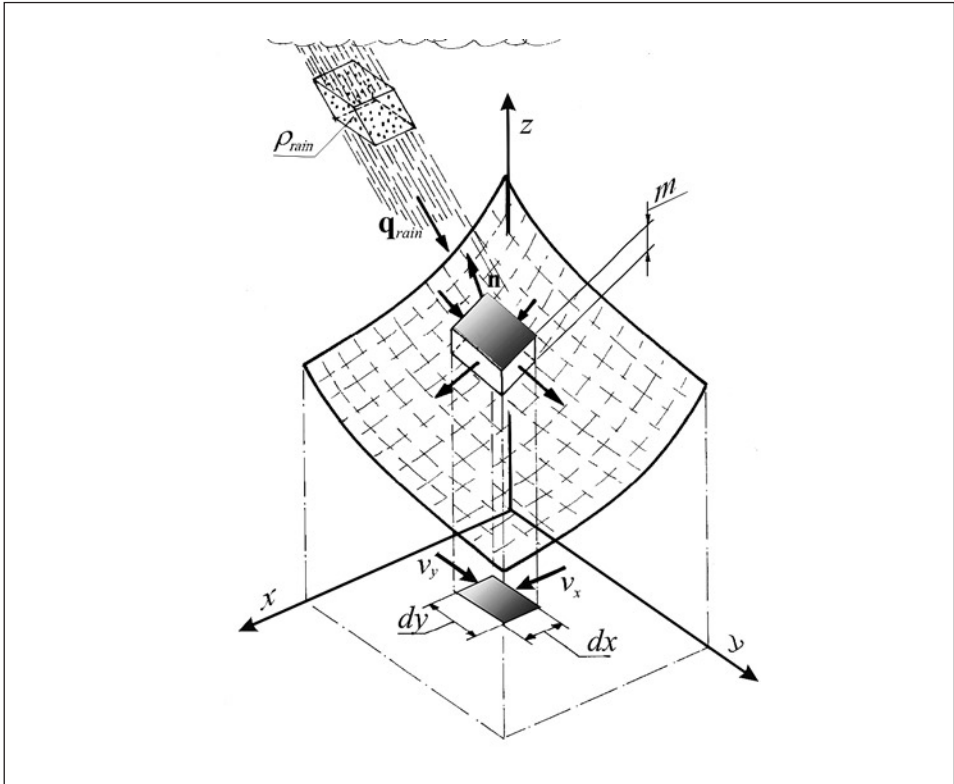


Figure 2: Illustration of how the law of mass conservation is used.

$$\text{and } \cos \alpha = \left[\left(\frac{\partial z}{\partial x} \right)^2 + \left(\frac{\partial z}{\partial y} \right)^2 + 1 \right]^{\frac{1}{2}}. \quad (10)$$

Substituting the formulae (6), (8), (9) and (10) into (3) we get the following differential equation for the law of mass conservation

$$\frac{\partial(mv_x)}{\partial x} + \frac{\partial(mv_y)}{\partial y} = \frac{Q_a}{v_{dr} t_d N_a} \left(-\frac{\partial z}{\partial x} v_w \cos \delta_w - \frac{\partial z}{\partial y} v_w \sin \delta_w + v_{dr} \right). \quad (11)$$

Eq. (11) gives a relationship between the velocity and depth of the water moving on the rock surface and the direction and force of the wind.

2. *The Navier-Stokes equation.* According to hydraulic calculations, water moves downwards on a rock surface in a thin layer as laminar flow with friction, therefore the velocity profile is parabolic as given by the Navier-Stokes equation (Fig. 4). The mean velocity along the profile is

$$v = \frac{\rho_{\text{water}} g h^2}{3\eta} \sin \alpha, \quad (12)$$

where g is the gravitational acceleration, η is the dynamic viscosity factor of water and h is the thickness of the water layer. There exists a simple relationship between h and m :

$$h = m \cos \alpha. \quad (13)$$

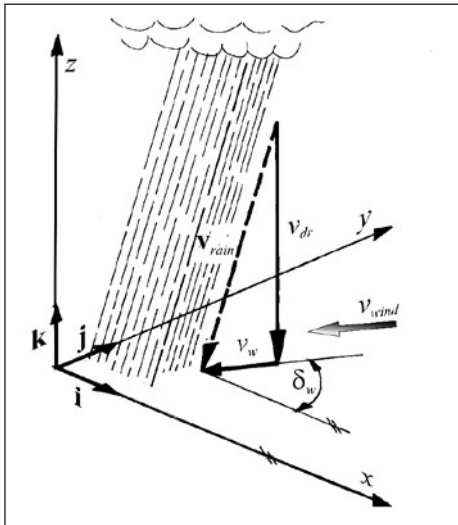


Figure 3: The movement of raindrops.

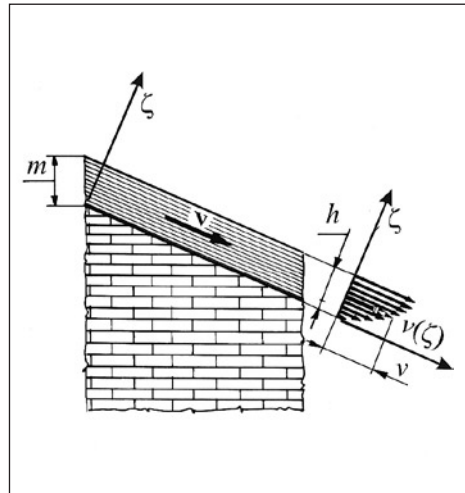


Figure 4: The velocity profile of water in a thin water layer.

The water flows down along the slope lines of the limestone surface, consequently the direction of its velocity vector is determined by the gradient of the surface. Calculating the appropriate partial derivatives of $z(x,y)$ the following formulae are drawn:

$$v_x = -\frac{\rho_{\text{water}}gh^2}{3\eta} \sin \alpha \cos \alpha \left[\left(\frac{\partial z}{\partial x} \right)^2 + \left(\frac{\partial z}{\partial y} \right)^2 \right]^{\frac{1}{2}} \frac{\partial z}{\partial x}, \quad (14)$$

$$\text{and } v_y = -\frac{\rho_{\text{water}}gh^2}{3\eta} \sin \alpha \cos \alpha \left[\left(\frac{\partial z}{\partial x} \right)^2 + \left(\frac{\partial z}{\partial y} \right)^2 \right]^{\frac{1}{2}} \frac{\partial z}{\partial y}. \quad (15)$$

(The minus sign refers to the fact that if the limestone surface is higher at larger x and y coordinates, i.e. the partial derivatives of z are positive, then the water flows into the opposite direction towards smaller x and y coordinates.)

3. *Relationship between the amount of dissolved CaCO_3 and the lowering speed of the rock surface.* Since precipitation water is aggressive due to the CO_2 content of the air, it is able to dissolve the limestone (Fig 5). Therefore the rock surface lowers at a speed of

$$w = \frac{q_{\text{rock}}}{\rho_{\text{rock}} \cos \alpha}. \quad (16)$$

where ρ_{rock} is the density of rock, q_{rock} marks the mass-flow density of the limestone.

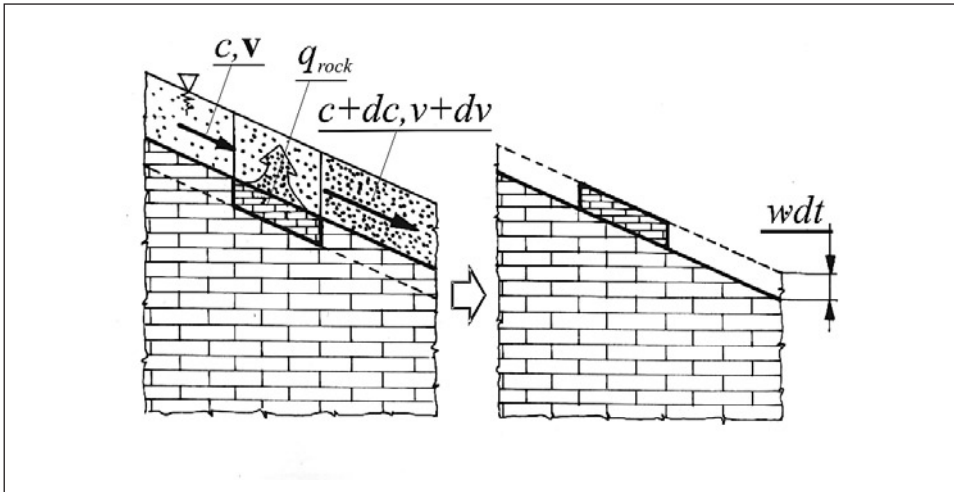


Figure 5: The relationship between the amount of dissolved limestone, the lowering of the surface and the concentration change of the water.

4. According to the law of *reaction kinetics* the larger is the difference between the equilibrium concentration, c_{eq} and the actual calcium-carbonate concentration, c , of the water, the faster is the solution process is. The mass-flow density of the limestone „moving” into the solution is proportional to this difference (Gabrovšek 2000):

$$q_{\text{rock}} = \begin{cases} k(c_{eq} - c), & \text{if } c \leq c_s, \\ k_n(c_{eq} - c)^n, & \text{if } c \geq c_s, \end{cases} \quad (17)$$

where k and k_n are solution velocity constants, $n \approx 4$, $c_s \approx 0.9c_{eq}$. The values of c_{eq} and k depend on the temperature of the water and on the CO_2 -content of the air (Dreybrodt 1988). Since in the present model, c is always smaller than c_s , hereafter only the upper part of formula (17) is taken into account.

5. *The law of mass conservation applied for the CaCO_3* . The law of mass conservation has its distinct validity also for CaCO_3 (cf. Fig. 5). Applying it for the abovementioned small imaginary volume, the difference between the amount of (dissolved) CaCO_3 input and the amount of the output through the sides of this volume is equal to the amount of CaCO_3 in the solution dissolved from the limestone surface during a time unit. Mathematically:

$$\frac{\partial(mv_x c)}{\partial x} + \frac{\partial(mv_y c)}{\partial y} = \frac{q_{\text{rock}}}{\cos \alpha}. \quad (18)$$

The number of unknown variables (z , α , m , h , v_x , v_y , w , q_{rock} and c) of equations (2), (10), (11), (13), (14), (15), (16) (17) and (18) is 9, therefore this system can – theoretically – be worked out. The independent variables of the equations are the x and y space coordinates and the t time. In order of solve this equation system one may start from a known initial limestone surface and so determine the future shape of the area at an arbitrary time, and also determine how much time is necessary for a given amount of denudation.

THE LAWS OF DENUDATION APPLIED FOR AN INITIALLY PLANE, SLOPING ROCK SURFACE

In the present paper we study the case of a limestone surface that is initially a plane surface sloping to the x direction with an angle of α_0 ; therefore the function describing the shape of this surface may be considered to be independent from y (Fig. 6). Consequently, in the above equations the partial derivatives with respect to y become 0, and the partial derivate of the z function (describing the shape of the surface) with respect to x is proportional to the slope gradient:

$$\frac{\partial z}{\partial x} = -\text{tg } \alpha. \quad (19)$$

(The minus sign indicates the fact that with increasing x the limestone surface will decrease.)

Taking into consideration all of these, the equations (10)-(18) will result (after mathematical transformations) in the followings:

$$v_x = \frac{\rho_{\text{water}} g m^2}{3\eta} \sin \alpha \cos^3 \alpha, \quad (20)$$

$$\frac{\partial}{\partial x} (m v_x) = \frac{Q_a}{v_{dr} t_d N_a} (\text{tg } \alpha \cos \delta_w v_w + v_{dr}), \quad (21)$$

$$\frac{\partial (m v_x c)}{\partial x} = \frac{k}{\cos \alpha} (c_{eq} - c), \quad (22)$$

$$w = \frac{k}{\rho_{\text{rock}}} \frac{c_{eq} - c}{\cos \alpha}. \quad (23)$$

Initial and boundary conditions are given as follows:

$$z(x, t)|_{t=0} = z_0 - \text{tg } \alpha_0 \cdot x \quad (24)$$

$$v_x(x, t)|_{x=0} = 0, \quad \text{and} \quad h(x, t)|_{x=0} = 0. \quad (25)$$

The values of z_0 , α_0 , δ_w , v_w , v_{dr} , k , c_{eq} , ρ_{rock} , η and g are given. The solution for $w(x, t)$ and $z(x, t)$ are to be determined.

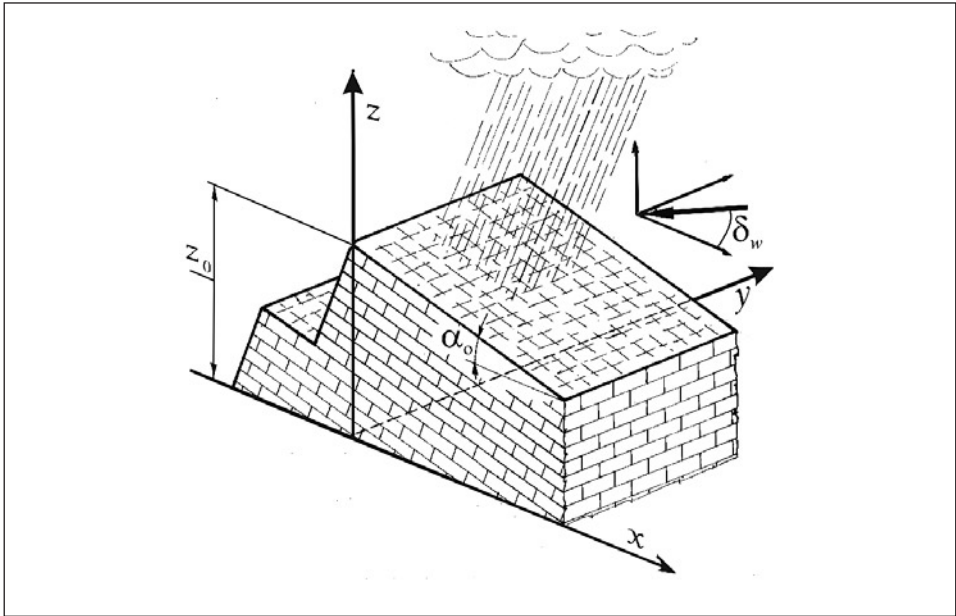


Figure 6: Illustration of the initially plane slope model.

Substituting v_x from (20) into (21):

$$\frac{\partial}{\partial x} \left(\frac{\rho_{\text{water}} g m^3}{3\eta} \sin \alpha \cos^3 \alpha \right) = \frac{Q_a}{v_{\text{dr}} t_d N_a} (\operatorname{tg} \alpha \cos \delta_w v_w + v_{\text{dr}}). \quad (26)$$

Let us localize (26) to the starting time of the denudation when $t=0$. According to the present model, the shape of the limestone surface is plane with a constant slope angle (α_o), which is independent from x . Using this fact and taking into account the boundary condition (25), equation (26) can be integrated:

$$m(x, t) \Big|_{t=0} = \frac{1}{\cos \alpha_o} \sqrt[3]{\frac{3\eta}{\rho_{\text{water}} g} \frac{\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}}}{\sin \alpha_o \cos \alpha_o} \frac{Q_a}{v_{\text{dr}} t_d N_a} x}. \quad (27)$$

From this equation it can be stated that at the beginning of the denudation process, the depth of the flowing water layer on the rock surface is proportional to the cubic root of the distance from the top of the slope. Writing m into Eq. (20) the following relationship is drawn for the velocity of the flowing water:

$$v_x(x, t) \Big|_{t=0} = \frac{\rho_{\text{water}} g}{3\eta} \sin \alpha_o \cos \alpha_o \left[\frac{3\eta}{\rho_{\text{water}} g} \frac{\sin \alpha_o \operatorname{tg} \delta_w v_w + \cos \alpha_o v_{\text{dr}}}{\sin \alpha_o \cos \alpha_o} \frac{Q_a}{v_{\text{dr}} t_d N_a} x \right]^{\frac{2}{3}} \quad (28)$$

Substituting m and v_x into Eq. (22) and after lengthy but fundamental transformations the following differential equation can be drawn for the function $c(x)$:

$$(\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_w) \frac{Q_a x}{v_{\text{cs}} t_d N_a} \frac{dc}{dx} = kc_{\text{eq}} - c \left[k + \frac{Q_a}{v_{\text{dr}} t_d N_a} (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_w) \right]. \quad (29)$$

Eq. (29) can be separated according to the variables:

$$\frac{(\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}}) \frac{Q_a}{v_{\text{dr}} t_d N_a} dc}{kc_{\text{eq}} - c \left[k + \frac{Q_a}{v_{\text{dr}} t_d N_a} (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}}) \right]} = \frac{dx}{x}, \quad (30)$$

which can be integrated into the following formula:

$$c(x, t) \Big|_{t=0} = \frac{k}{k + \frac{Q_a}{v_{\text{dr}} t_d N_a} (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}})} c_{\text{eq}} + \frac{-\frac{kv_{\text{drs}} t_d N_a + Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}})}{Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}})}}{+A \cdot x} \quad (31)$$

where A is an integration constant. Since the second term of the right side of the equation converges to ∞ as $x \rightarrow 0$, the physical interpretation of (31) requires that $A=0$. Therefore

$$c(x, t) \Big|_{t=0} = \frac{k v_{dr} t_d N_a}{k v_{dr} t_d N_a + Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_w)} c_{eq}. \quad (32)$$

The lowering speed of the limestone surface can be drawn if c is substituted into (32):

$$w(x, t) \Big|_{t=0} = \frac{k}{\rho_{rock}} \frac{c_{eq}}{\cos \alpha_o} \frac{Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{dr})}{k v_{dr} t_d N_a + Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{dr})}. \quad (33)$$

As the right side of this expression is independent from x , it means that at the beginning all points of the limestone surface have the same lowering speed, i.e. there is a parallel slope retreat. But this fact implies a very important consequence: if the rock surface was plane at the start it remains plane later as well. However, if the limestone surface preserves its plane shape with an angle α_o then the formulae (27), (32) and (33) are valid for not only time $t=0$ but for any time later on, consequently w is constant in both space and time (Fig. 7). Similarly, according to (32) the concentration of water flowing on the surface is also independent from x . It means that there is a dynamic equilibrium between the ‘diluting effect’ of fresh rain water and the ‘concentration-increasing’ effect of the dissolution process.

The expression (33) does not give any direct information about the long-term mean lowering speed of the limestone surface because it is valid only for the duration of rainfall. The total annual lowering of the surface can be calculated by multiplying the surface lowering of a given time unit as expressed by (33) and the total annual duration of rainfalls:

$$w_a = \frac{dz}{dt} t_d N_a, \quad (34)$$

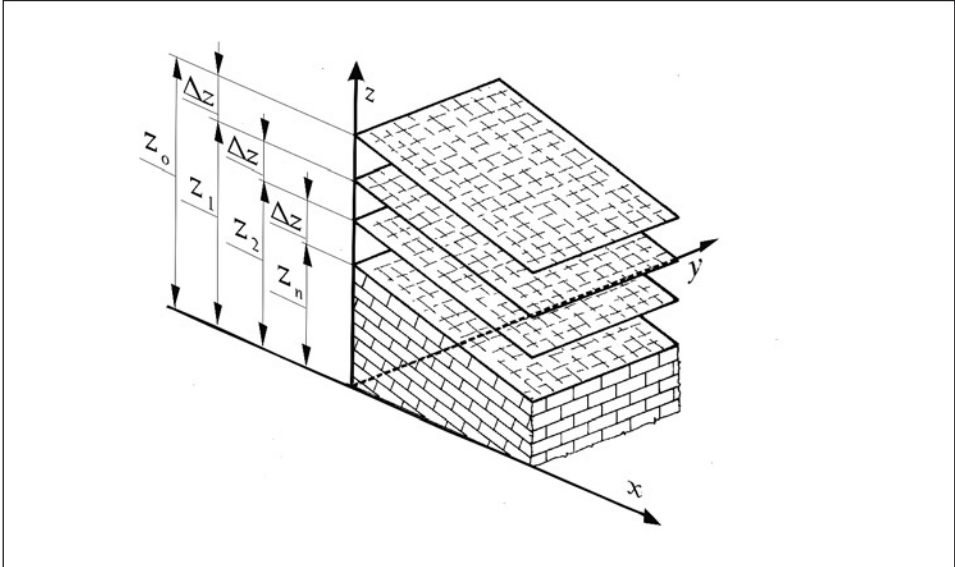


Figure 7: The shape of the intially plane limestone surface as a function of time.

$$\text{therefore } w_a = \frac{k}{\rho_{\text{rock}}} \frac{c_{\text{eq}}}{\cos \alpha_o} \frac{Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}}) t_d N_a}{k v_{\text{dr}} t_d N_a + Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}})}. \quad (35)$$

For calculations it is recommended to build in some conversion constants by substituting parameters as used in everyday practice. Let S_h be the hour-second, M_{mm} the millimeter-meter conversion value. Adding it to the above formula we obtain:

$$w_a = \frac{k}{\rho_{\text{rock}}} \frac{c_{\text{eq}}}{\cos \alpha_o} \frac{Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}}) t_d S_h N_a M_{\text{mm}}}{k v_{\text{dr}} t_d S_h N_a + Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}})}. \quad (36)$$

The shape of the surface can be drawn by the integration of (2), which is easy in the present case since the function w at the left side is constant, as it was stated above:

$$z(x, t) = z_0 - w_a \cdot t - \text{tg } \alpha_o \cdot x. \quad (37)$$

The Eq. (36) gives the vertical velocity of surface lowering. However, the following question may arise: how thick is the layer that is peeled from the layer in a given time. Its annual rate can be calculated as follows:

$$\dot{b}_a = \cos \alpha_o \cdot w_a \quad (38)$$

where \dot{b}_a is the annual thickness of the peeled rock layer.

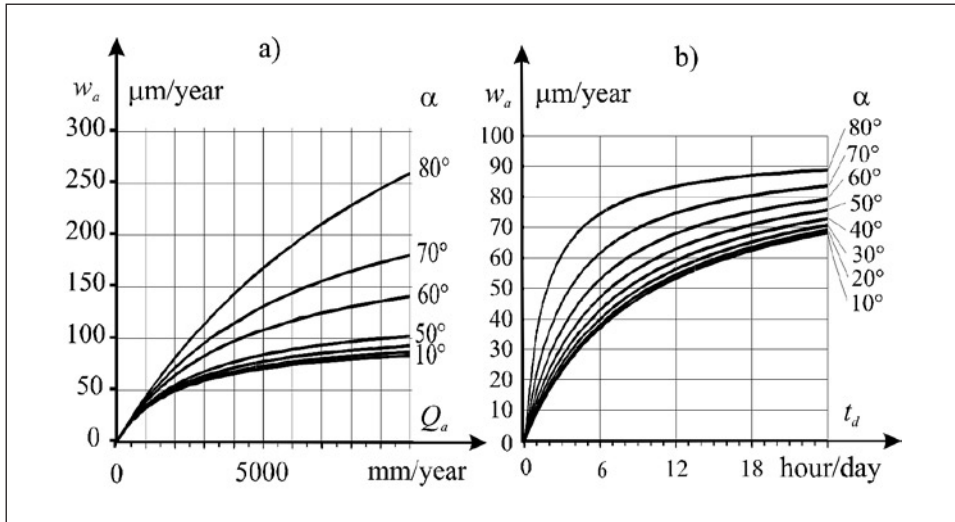


Figure 8: The lowering speed of the surface.

a) as a function of the annual precipitation ($T_d = 10$ hours/day, $v_w = 0$ m/s)

b) as a function of the daily rainfall hours ($Q_a = 2000$ mm/year, $v_w = 0$ m/s)

Finally, the Δt time necessary for the Δz denudation of a karstifying slope is given:

$$\Delta t = \frac{\rho_{\text{rock}}}{k} \frac{\cos \alpha_o}{c_{\text{eq}}} \frac{k v_{\text{dr}} t_d N_a + Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}})}{Q_a (\sin \alpha_o \cos \delta_w v_w + \cos \alpha_o v_{\text{dr}}) t_d S_h N_a M_{\text{mm}}} \Delta z. \quad (39)$$

QUALITATIVE AND QUANTITATIVE ANALYSIS OF THE DERIVED RELATIONSHIPS

The parameter values in the aforementioned formulae are as follows: the dynamic viscosity of water: $\eta = 1,9 \cdot 10^{-3}$ kg/m·s; the density of limestone $\rho_{\text{rock}} = 2300$ kg/m³; the gravitational acceleration $g = 9,81$ m/s². In case of open air carbon-dioxide content and $T = 5^\circ$ C the velocity constant of the dissolution $k = 3,2 \cdot 10^{-7}$ m/s, the equilibrium concentration of calcium-carbonate $c_{\text{eq}} = 0,0546$ kg/m³ (Dreybrodt & Eisenlohr 2000). The falling speed of raindrops $v_{\text{dr}} = 3-8$ m/s (Budó 1972). The numerical values of the conversion parameters: $N_a = 365$ days/year, $S_h = 3600$ s/hour, $M_{\text{mm}} = 1000$ mm/m.

In Fig. 8a the lowering speed is presented as a function of annual precipitation at different slope angles (assuming $t_d = 10$ hours/day rainfall time). It can be observed that in case of $Q_a = 2-6000$ mm/year precipitation the lowering speed is 50-150 $\mu\text{m}/\text{year}$. It is also clear that steeper slopes have a faster lowering speed. It is noteworthy that the increase of w_a with growing Q_a is not linear.

In Fig. 8b w_a is represented as a function of daily rainfall hours at constant annual precipitation ($Q_a = 2000$ mm/year). It is remarkable that a longer duration of rainfall results in faster denudation. It suggests that if the precipitation is mainly in forms of short, intense showers the denudation is less effective, whereas long, soft rains result in larger denudation. This can be explained by the fact that

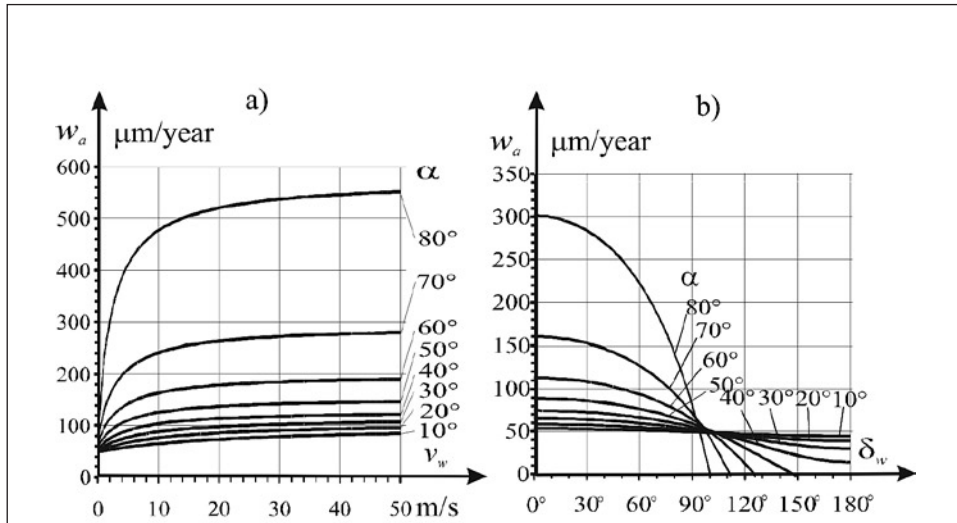


Figure 9: The lowering speed of the surface as a function of a) the wind speed ($\delta_w = 0$) and b) the wind direction ($v_w = 2$ m/s). ($Q_a = 2000$ mm/year, $t_d =$ hours/day).

although intense rains dissolve more CaCO_3 during the duration of rainfall, there is no corrosion during long inter-rain periods.

In Fig. 9a the denudation rate is shown as a function of wind-speed above the area (at constant values of Q_a and t_d). It can be seen that wind increases the rate of denudation. This increase in corrosion is, of course, larger as the slope becomes steeper because in this case the surface exposed to the wind is greater. But it is also observable that the increase of w_a with growing wind-speed is not linear but converges asymptotically. Consequently, above a threshold-limit further increase in wind speed will practically not result in a higher lowering speed.

Fig. 9b illustrates the influence of the direction of the wind (at constant Q_a , t_d and v_w). It is remarkable how sensitive the denudation rate is to the aspect of the slope. Highest denudation values are expected at winds blowing against the slope. As the wind direction turns away, w decreases gradually and at $\delta_w > 90^\circ$ (i.e. the wind blows from „upstream”, down the slope) the rate of denudation quickly drops and it may even become 0 depending on the slope angle. Fig. 9b clarifies how the extreme karren forms of stormy areas (Veress & al. 2003) can develop where the orientation of the karren is definitely in connection with the prevailing wind direction.

According to Fig. 10a the time necessary to cause corrosion decreases with growing annual precipitation, but it does not diminish below a certain limit. The time necessary for corrosion is shorter in case of long, soft rains (as evidenced by Fig. 10b) than in case of short, intense showers (assuming equal annual precipitation).

The diagrams demonstrate that the presented theoretical model is numerically in agreement with field experiment data, since the average denudation rate values are in the range of 50-500 $\mu\text{m/a}$ according to earlier field research (High & Hanna 1970, White 2000).

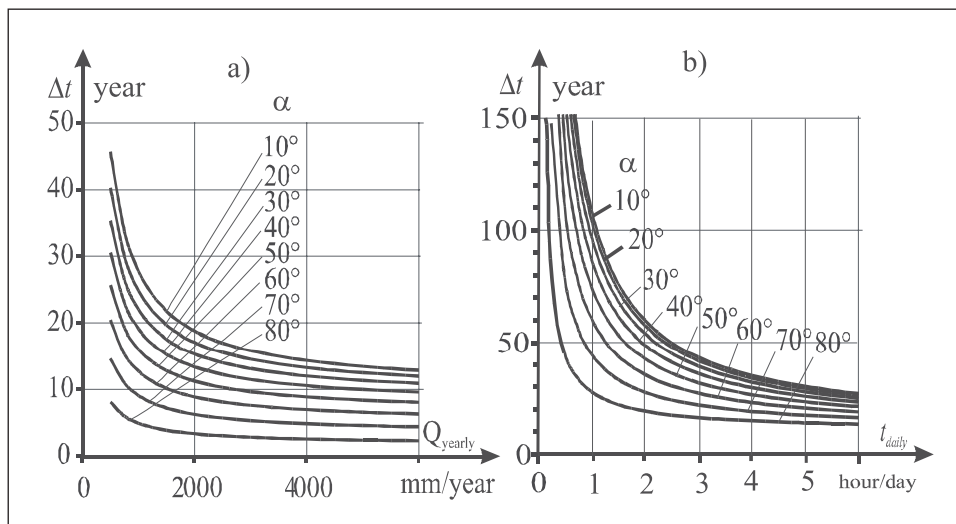


Figure 10: The time necessary for the corrosion of a 1 mm thick rock layer as a function of a) the annual precipitation ($T_d = 10$ hours/day, $v_w = 0$ m/s), b) the daily rainfall hours ($Q_a = 2000$ mm/year, $v_w = 0$ m/s).

CONCLUSIONS

According to the derived theoretical model, denudation of an initially plane limestone surface with a constant slope angle due to precipitation occurs in a way that the angle of the slope remains the same for longer periods, that is the limestone surface retreats parallel to itself. The rate of denudation is not proportional to rain intensity, i.e. if annual precipitation occurs mainly in the form of long, soft fall of rain the annual lowering speed of the limestone surface is higher than in the case of short and intense showers. The equations take also into account the direction and force of the wind during the rainfall. Increased wind-speed results in a higher corrosion rate on steeper rock slopes exposed to the wind. Corrosion rate, however, cannot surpass a certain limit in wind of any strength. The concentration of the thin water layer flowing down the rock surface is constant along the slope (i.e. it is in dynamic equilibrium). Inserting real values of precipitation in the equations, the denudation rate of the rock surface is in the range of 50-300 $\mu\text{m/a}$.

REFERENCES

- Budó, Á. 1971: Kísérleti fizika I. (Experimental Physics) – Tankönyvkiadó, Budapest, 517.p.
- Dreybrodt, W. 1988: Processes in Karst Systems. Physics, Chemistry and Geology. – Springer, Berlin, New York, Heidelberg, 294. p.
- Dreybrodt, W., Eisenlohr, L. 2000: Limestone dissolution rates in karst environments. – In: A. Klimchouk, D.C. Ford, A.N. Palmer & W. Dreybrodt (edit.), *Speleogenesis: Evolution of Karst Aquifers*. NSS, Huntsville.
- Ford, D.C., Williams, P. 1989: Karst geomorphology and hydrology. – Unwin Hyman, London, England, 601.p.
- Gabrovšek, F. 2000: *Evolution of early karst aquifers: from simple principles to complex models*. – Založba ZRC, Ljubljana, 150.p.
- High, C., Hanna, F. K. 1970: A method for the direct measurement of erosion on rock surfaces. – *British Geomorphological Research Group Technical Bulletin*, no. 5, 24 p.
- Klimchouk, A., D.C. Ford, A.N. Palmer & W. Dreybrodt (edit.), *Speleogenesis: Evolution of Karst Aquifers*. NSS, Huntsville. 527.p.
- Plummer, T., Wigley, T., Parkhurst, D. 1978: The dissolution of calcite on CO_2 -water systems at 5° to 60°C and 0.0 to 1.0 atm CO_2 , – *American journal of science*, 278. p. 179-795
- Szunyogh, G. 2000: The Theoretical-Physical Study of the Process of Karren Development – *Karsztfejlődés IV. Szombathely*. p. 125-150.
- Telbisz, T. 1999a: The qualitative and quantitative effect of precipitation on karst corrosion. In: Zámbo L., Telbisz, T. (eds.): *Investigations of karst corrosion*. – ELTE TTK, Budapest, p. 11-13.
- Telbisz, T. 1999b: Számítógépes szimuláció a felszínaktanban. (Computer simulation in geomorphology) – *Földr. Közl.*, 123. k. p. 151-162.
- Veress, M. 2000: The main types of karren development of limestone surface without soil covering – *Karsztfejlődés IV. Szombathely*. p. 7-30
- Veress M.-Tóth, G.-Zentai Z.-Czöpek I. 2003: Vitesse de recul d'un escarpement lapiazé (Ile Diego de Almagro, Patagonie, Chili) – *Karstologia* No 41-1/2003, p. 23-26.
- Veress, M., Tóth, G. 2004: Types of meandering karren – *Z. Geomorph. N. F.* 48. 1. p. 53-77
- White, W. B. 2000: Dissolution of limestone from field observations. In: A. Klimchouk, D.C. Ford, A.N. Palmer & W. Dreybrodt (edit.), *Speleogenesis: Evolution of Karst Aquifers*. NSS, Huntsville.