

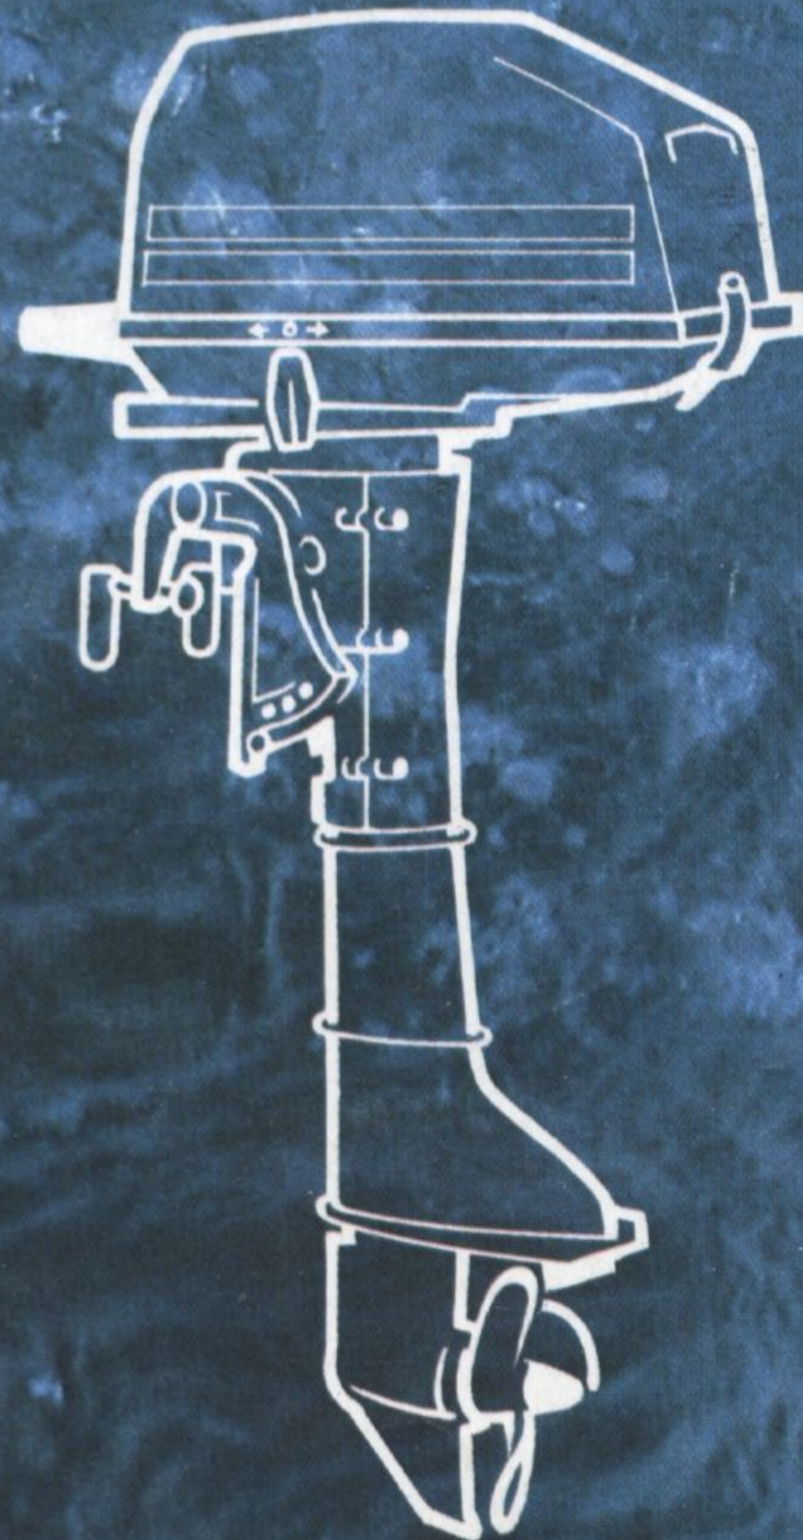


TOMOS

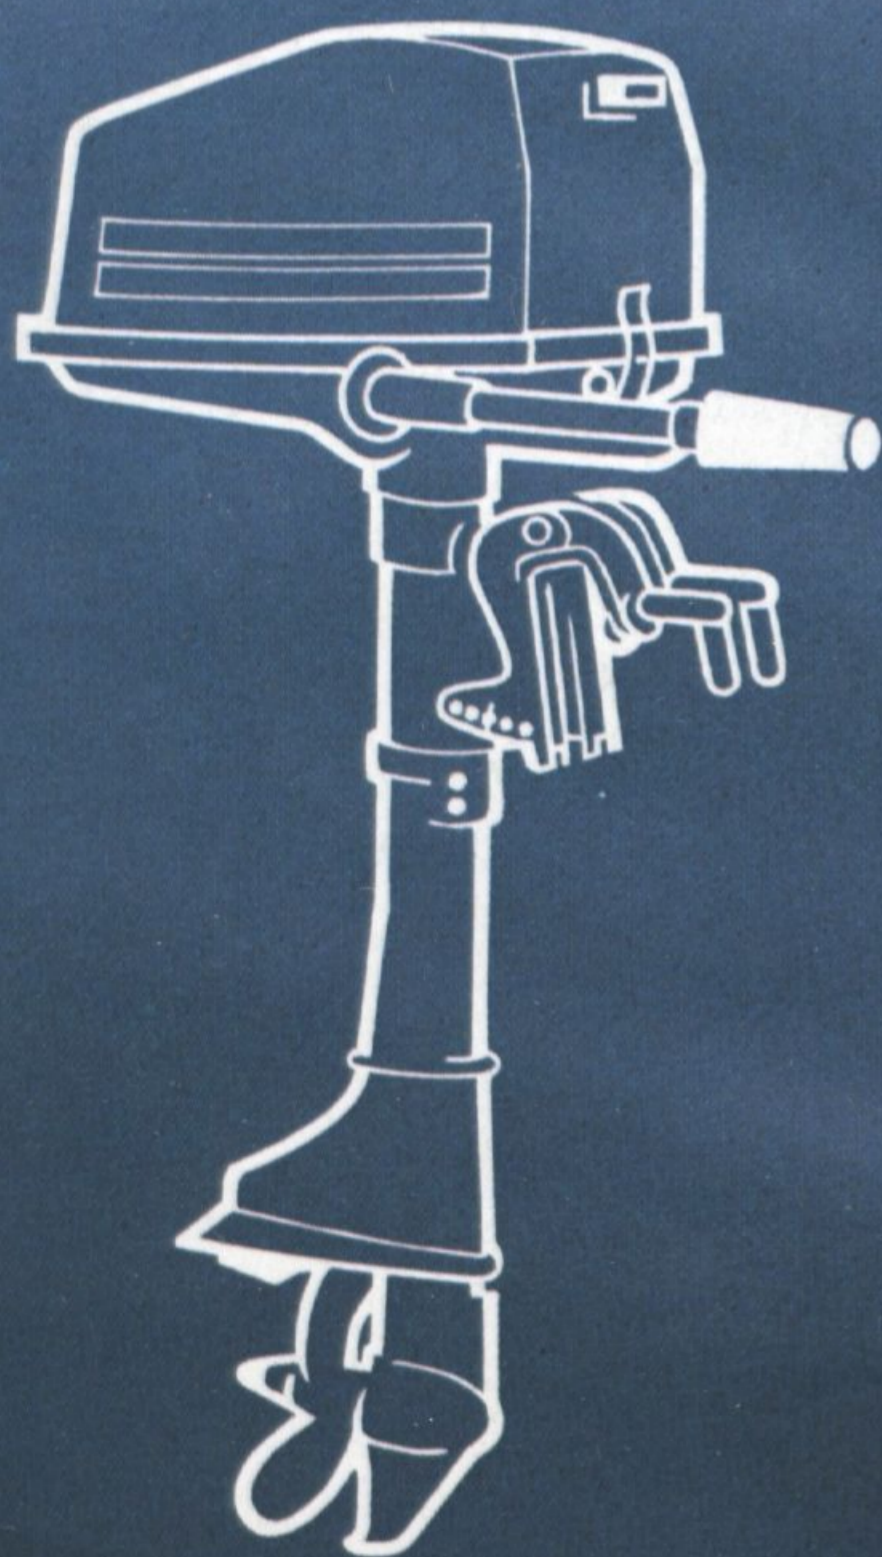

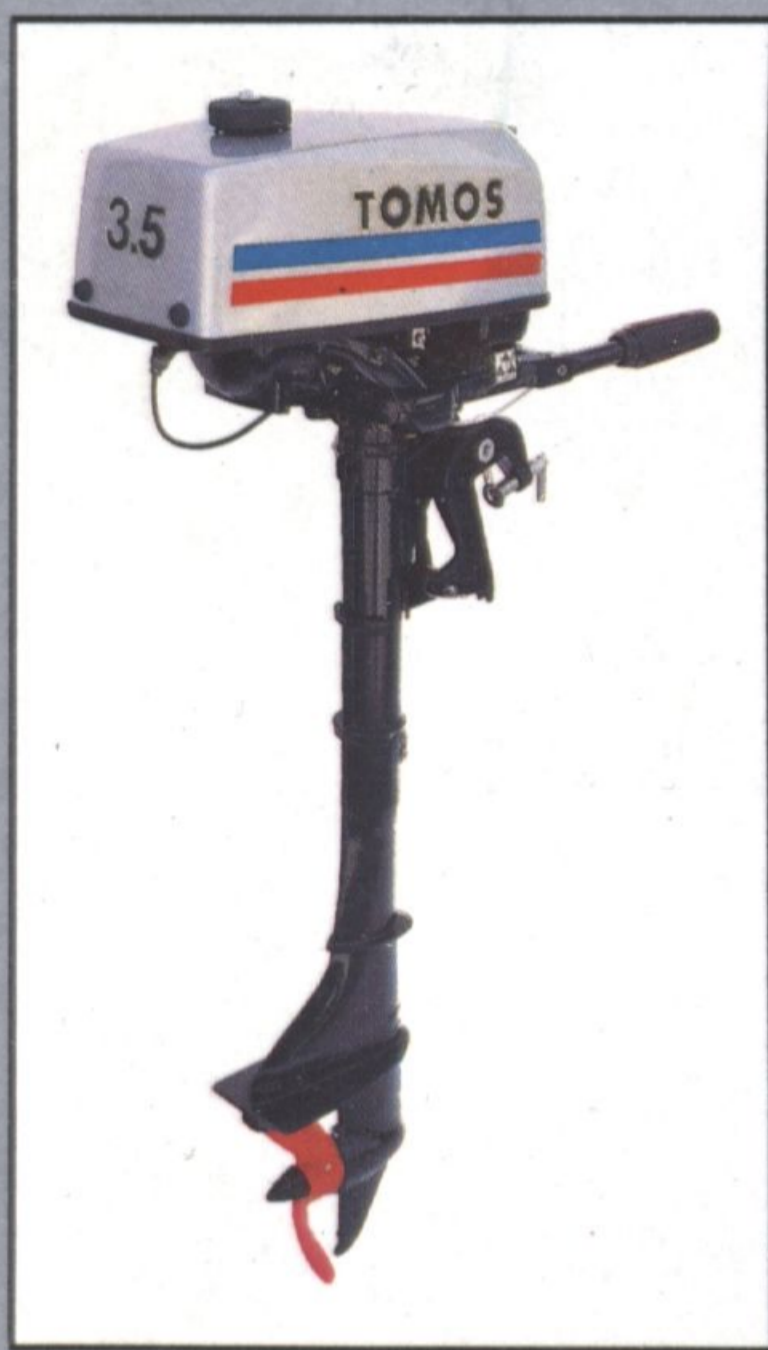

**TOVARNA MOTORNIH VOZIL
TOMOS
KOPER YUGOSLAVIA**

TOMOS NEDERLAND B.V.

U.K. Division
44/46 Stocks Street
Manchester M8 8QG
Phone: 061-834-6117
Telex: 665152

YOUR DEALER:

	T 3.5	T 4 — T 4R	T 4.5	T 4.8	T 10 — T 10E	T 18 — T 18E
ENGINE	single-cylinder two-stroke	single-cylinder two-stroke	single-cylinder two-stroke	single-cylinder two-stroke	two-cylinder two-stroke	two-cylinder two-stroke
Bore x Stroke	42 x 43 mm	42 x 43 mm	42 x 43 mm	48 x 43 mm	55 x 52 mm	55 x 52 mm
Piston Displacement	60 cc	60 cc	60 cc	80 CC	247 cc	247 cc
Max Output on Propeller Shaft	1.8 kW (2 HP) / 4800 RPM	2.2 kW (2.5 HP) / 5400 RPM	2.2 kW (2.5 HP) / 5400 RPM	2.5 kW (3.4 HP) / 5100 RPM	7.3 kW (9.9 HP) / 4500 RPM	13 kW (17.7 HP) / 5800 RPM
Static Thrust /N	350	420	420	480	850	1150
Propeller (Dia x Pitch) Special accessories	two-blade 200 x 140 mm 200 x 120 mm 200 x 160 mm	two-blade 200 x 140 mm 200 x 120 mm 200 x 160 mm	two-blade 200 x 140 mm 200 x 120 mm 200 x 160 mm	three-blade 200 x 140 mm 200 x 160 mm	three-blade 225 x 275 mm 225 x 225 mm 225 x 250 mm	three-blade 225 x 250 mm 225 x 225 mm 225 x 275 mm
Ignition	Flywheel Magneto	Flywheel Magneto	capacitor-discharge HT system	capacitor-discharge HT system	capacitor-discharge HT system	capacitor-discharge HT system
Cooling	air-water	air-water	air-water	air-water	water, thermostatic control, thermic protection switch	water, thermostatic control, thermic protection switch
Gear Control	180° pivot reverse	180° pivot reverse	180° pivot neutral	F-N-R gearshift	F-N-R gearshift	F-N-R gearshift
Current Supply	On request 6 V 17 W AC	12 V 50 W AC	12 V 60 W AC	12 V 60 W AC	12 V 75 W AC 12 V 50 W DC	12 V 75 W AC 12 V 50 W DC
Weight (long shaft)	15.5 kg (16 kg)	15.7 kg (16.2 kg)	16.5 kg (17 kg)	18.2 kg (18.7 kg)	35.2 kg (36.3 kg)	35.2 kg (36.3 kg)
Fuel Consumption at Full Throttle	1.30 l/h	1.60 l/h	1.60 l/h	1.70 l/h	5 l/h	8 l/h
Fuel: Mixture of Petrol and Two-Stroke Marine Engine Oil	2 %	2 %	2 %	2 %	2 %	2 %
Fuel Tank	integral 2 L	T4: separate 12 L T4R: integral 2 L + attachment for separate tank 12 L	separate 12 L	separate 12 L	separate 24 L	separate 24 L

T 10E, T 18E: Electric starter version.

All the T 10 and T 18 models: Remote control assy. available on request.