

30

*motorne žage*


# TOMOS



*pojem popolnosti*



TOMOS 650

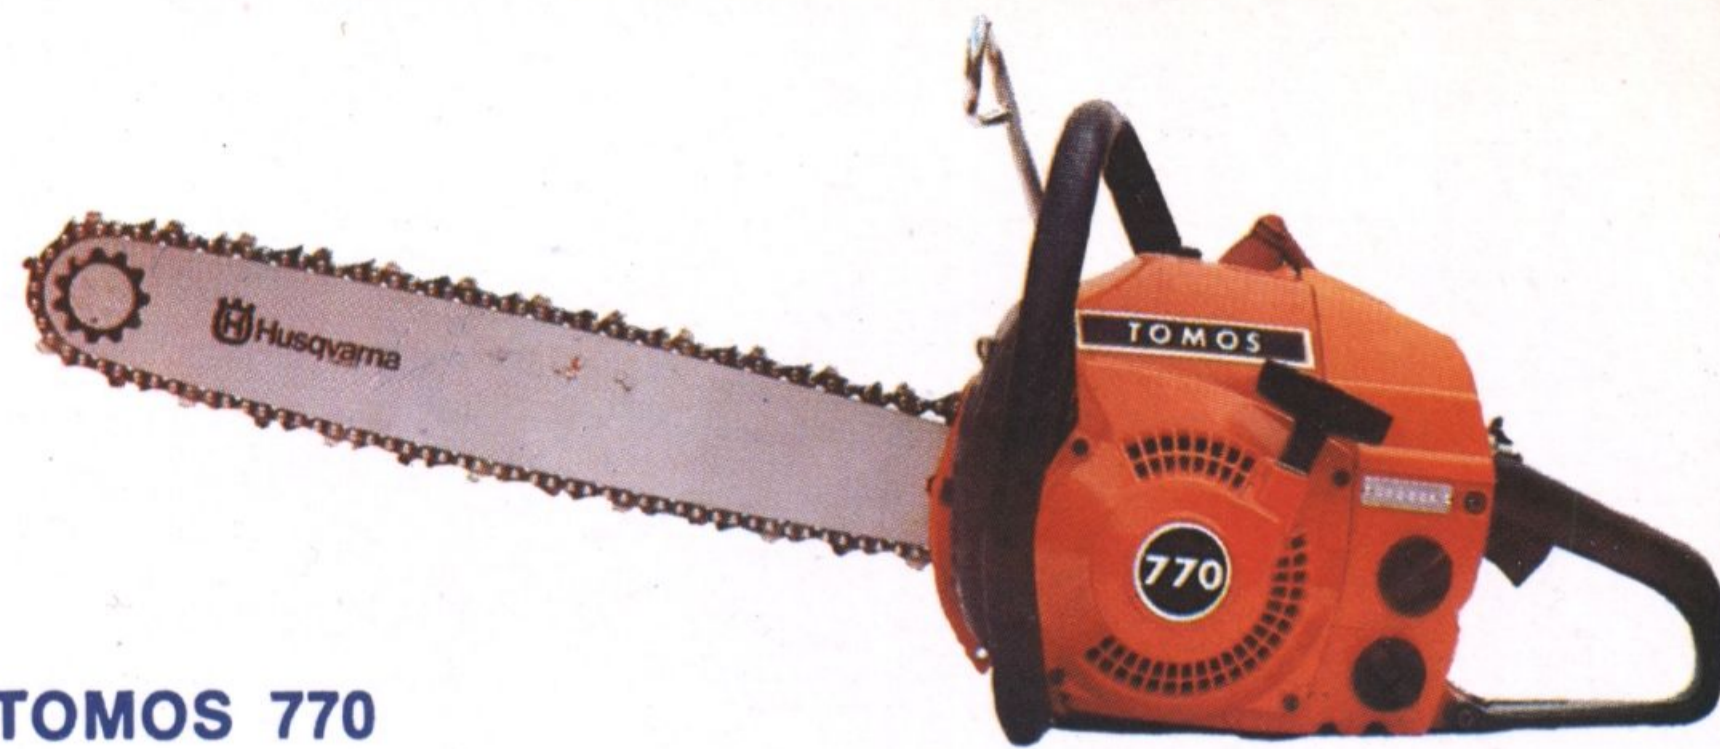


TOMOS 770



TOMOS 234 SE/SG




TOMOS 154 SE/SG

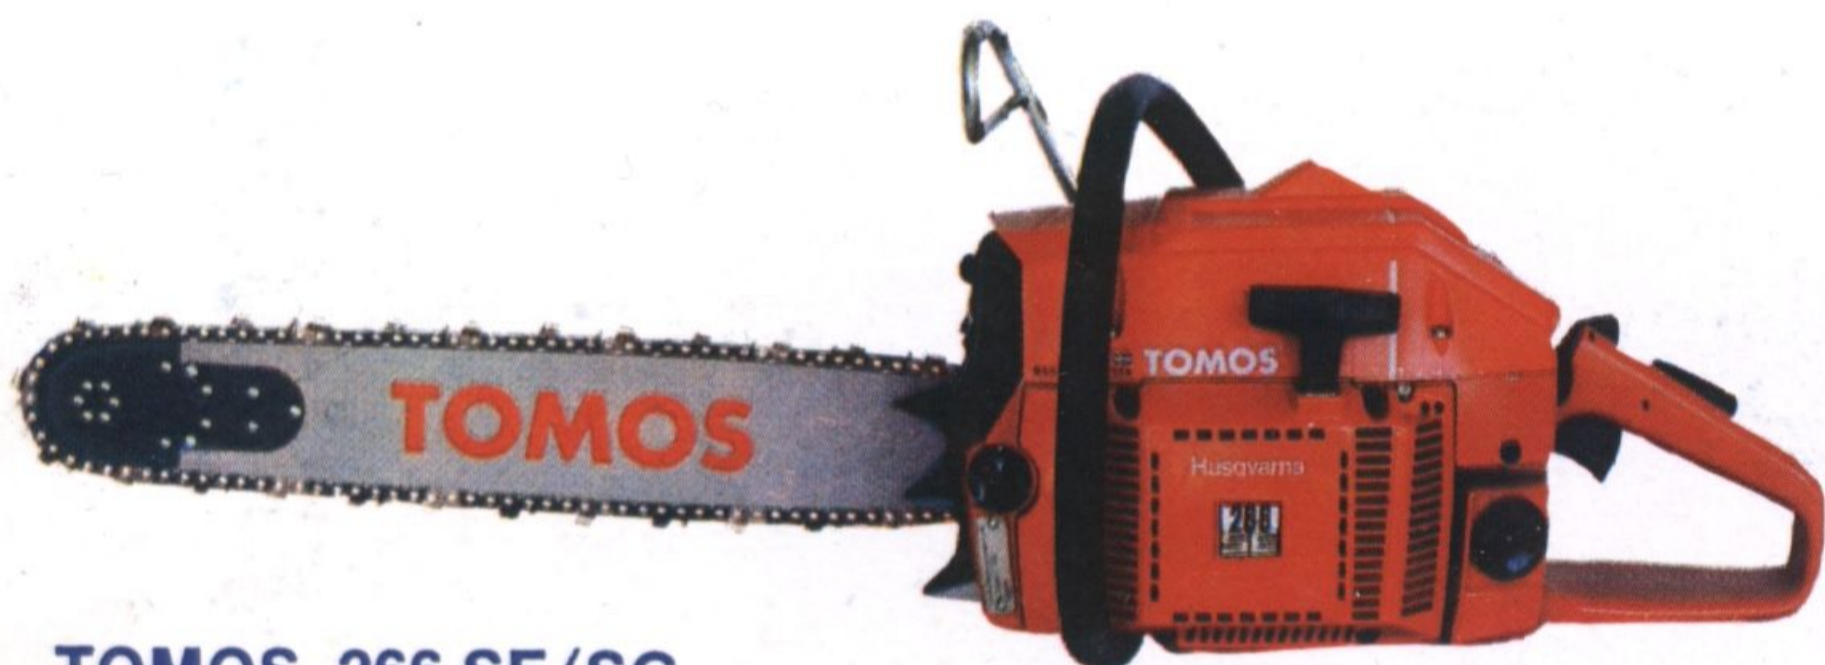


TOMOS 266 SE/SG



TOMOS 181 SE/SG

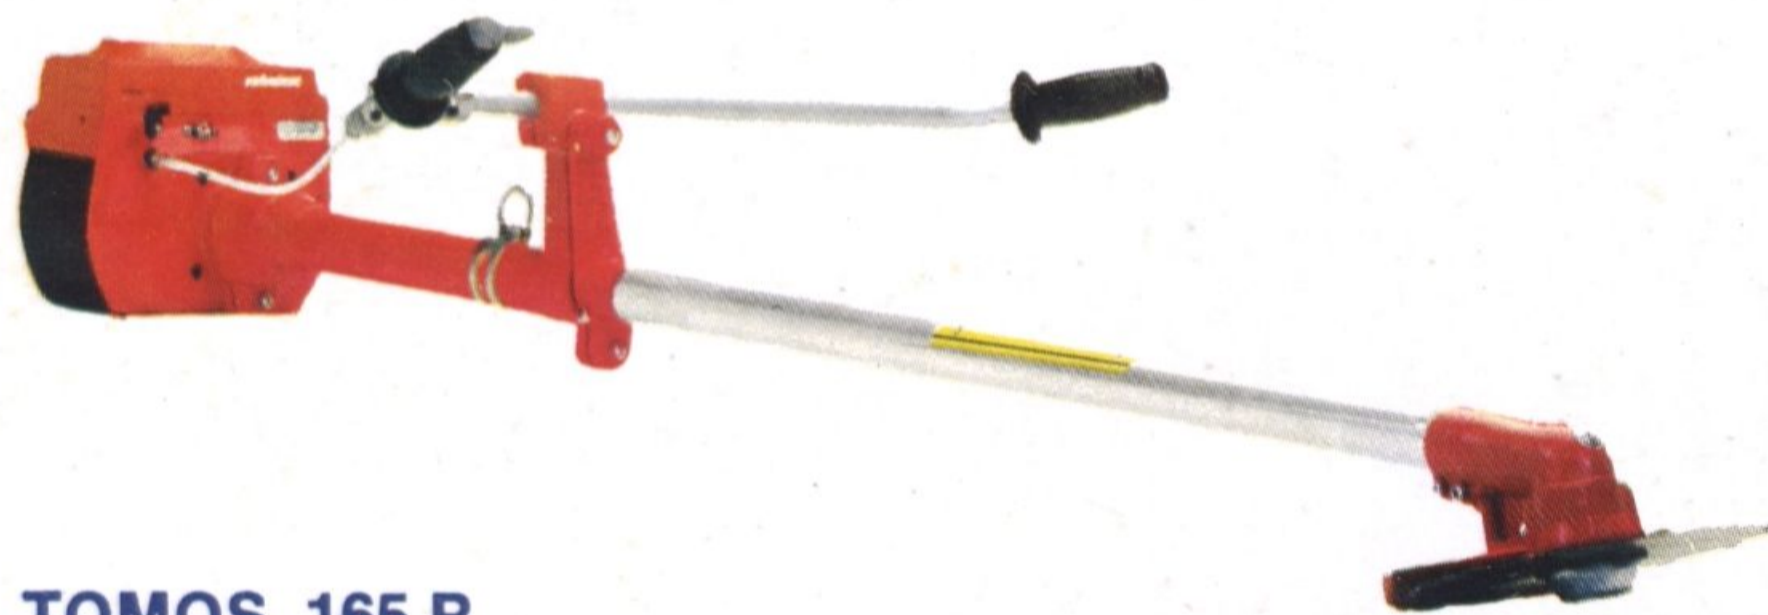

TOMOS 165 R

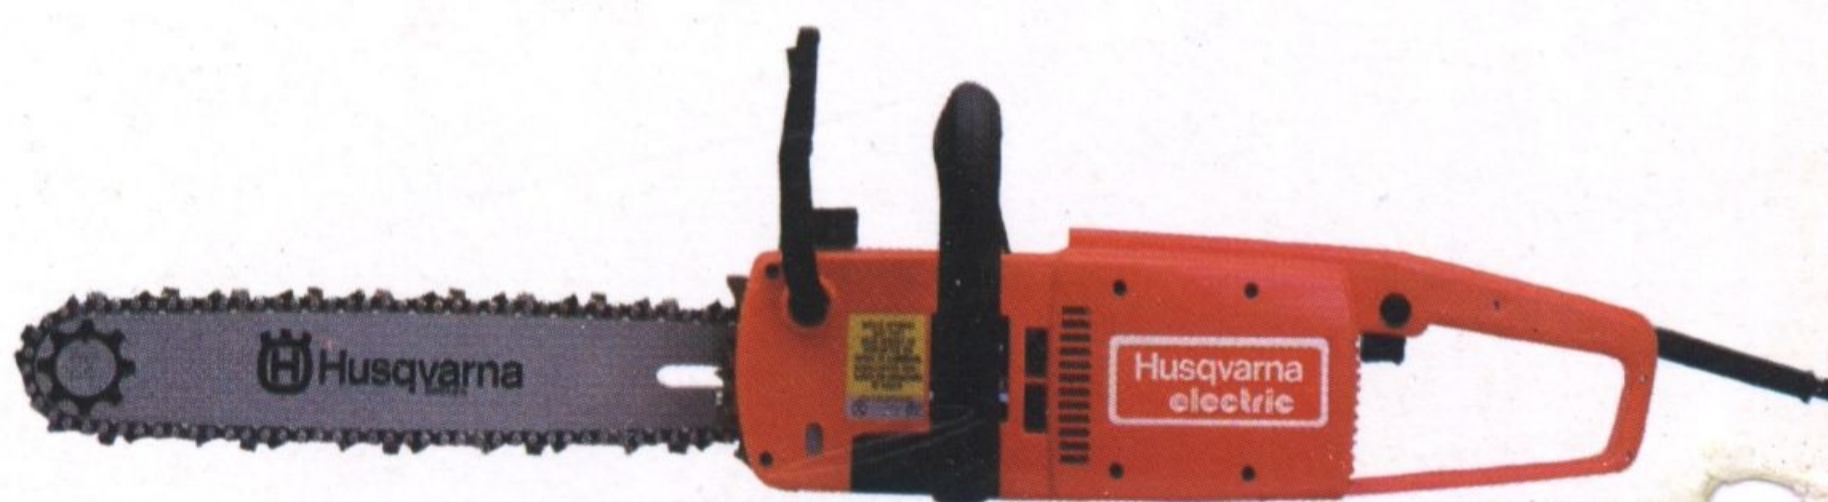

TOMOS ELECTRIC

**TEHNIČNI PODATKI**

MODEL ŽAGE TOMOS	650	770	234 SE/SG	154 SE/SG	266 SE/SG	181 SE/SG	165 R	ELECTRIC
DELOVNA PROSTORNINA	65 cm <sup>3</sup>	77 cm <sup>3</sup>	34 cm <sup>3</sup>	54,2 cm <sup>3</sup>	66,7 cm <sup>3</sup>	81 cm <sup>3</sup>	65 cm <sup>3</sup>	elektromotor
NAJVEČJE ŠTEVILO VRTLJAJEV (min <sup>-1</sup> )	8500	8500	9600	9000	8500	8400	8700	—
MOČ MOTORJA	2,9 kW	3,3 kW	1,9 kW	2,8 kW	3,2 kW	4 kW	2,9 kW	1,4 kW
TEŽA ŽAGE BREZ VODILA IN VERIGE	6,8 kg	7 kg	4,5/4,6 kg	5,3/5,4 kg	6,2/6,4 kg	6,7/6,8 kg	brez jermen. 10,6 kg	3,7 kg
STANDARDNO VODILO	18"~45 cm 20"~50 cm	15"~38 cm 20"~50 cm	13"~32 cm	13"~32 cm 15"~38 cm	15"~38 cm 24"~60 cm	15"~38 cm 26"~65 cm	krožna žaga MAXI 225	13"~32 cm 15"~38 cm
KORAK VERIGE	3/8"	3/8"	0,325"	0,325"	3/8"	3/8"	—	0,325"
VŽIGALNA NAPRAVA	MAGNET.	MAGNET.	ELEKTRON.	ELEKTRON.	ELEKTRON.	ELEKTRON.	ELEKTRON.	—
PROSTORNINA REZERVOARJA ZA GORIVO	0,75 l	0,7 l	0,5 l	0,63 l	0,75 l	0,9 l	1,1 l	—
PROSTORNINA REZERVOARJA ZA OLJE	0,41 l	0,3 l	0,27 l	0,32 l	0,45 l	0,5 l	—	0,14 l

GORIVO: MEŠANICA OLJA ZA DVOTAKTNE MOTORJE IN BENCINA V RAZMERJU 1 : 25 (4 %).